



Classic **EM-2**

The Classic EM-2 ceiling mount air-conditioning evaporator provides the market's best solution between price, performance and maintenance. It's well-known for ease of servicing and quick installation in commercial and school buses. With the

drain pan as part of the base system the Classic EM-2 can be installed, charged and tested before the cover is put in place. The easy removal of the cover makes all serviceable components accessible. This evaporator is available for non-ducted free blow applications.




Features

- Multi-speed, high-efficiency blowers
- Available for front or rear ceiling mount
- Heavy duty construction with galvanized steel frame and blower housing

Benefits

- Maximum airflow on high speed
- Flexible to fit any application
- Strength and durability

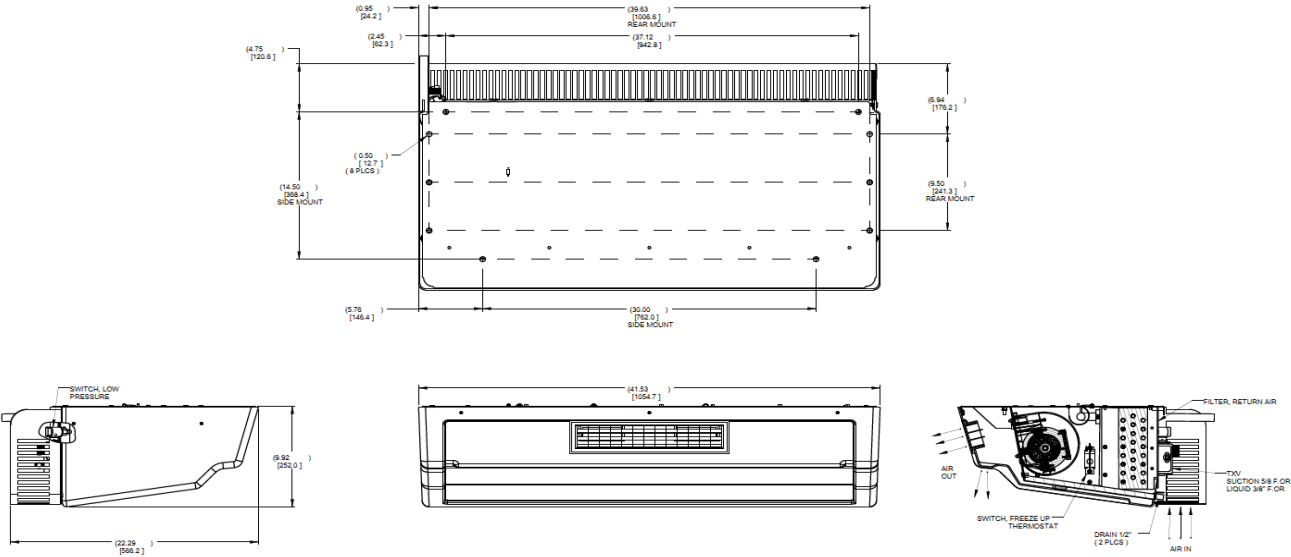

Technical Data

Cooling capacity	40000 Btu/hr (10.1 kW) IMACA ^[1]
Heating capacity (Optional Feature)	40000 Btu/hr (10.1 kW)
Air flow	513 CFM (872 m ³ /hr) ^[2]
Max amperage requirement	17 A @ 13.5 V dc (High Speed) Voltage
Refrigerant	R134a
Length	41.53 (1055 mm)
Width	22.29 (566 mm)
Height	9.92 (252 mm)
Weight	56.5 lbs (25 kg)
Condensate drain connection	5/8" (12.7 mm) O.D (doal drains)
Cover color	Dove Gray

[1] IMACA conditions: 100°F (38°C) / 90°F (32°C) / 50% RH
 [2] Airflow is tested at super high speed with cover and louvers fully installed, 0" static, 13.5 VDC

