

OTHER OPTIONS

Controllers

- Fully digital to basic analogue



Defrosters

- Glycol or Electric



Heaters

- Free blow, fan forced or convection
- Glycol or Electric




Compressores

- Reciprocating with capacity control standard for all conventional AC applications
- Reciprocating and scroll available for electric AC applications



CUSTOMER CARE

Field Service

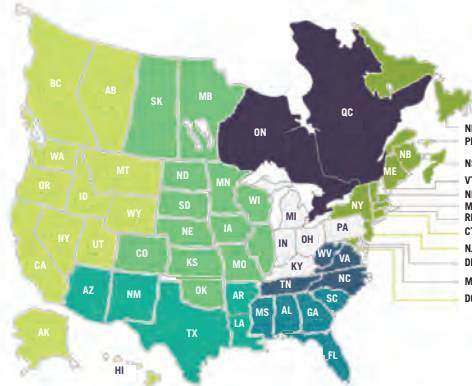

Derek Florence
Cell: 574-349-1030

George Zimicha
Office: 913-599-3141

Glenn Skipper
Cell: 574-202-0770

Greg Hughes
Cell: 574-606-9038

Edward Panick
Cell: 717-309-0548

Paul Trim
Cell: 647-629-8455

Scott Mathews
Office: 336-764-2218
Cell: 338-847-8710

Charles Merson
Office: 717-767-3332
Cell: 717-683-5293

- Global dealer network
- Call Center
- 8 Regional Field Service Representatives
- MCC Certified University
- Regional Field Service Technician



SERVICE PARTS

MCC parts portal @ www.mcc-hvac.com



- 60k sq. ft. dedicated parts distribution center
- 24/7 Accessibility
- Real-time price and availability
- Specified item lead time
- Automatic order entry
- Same day processing and shipping



Mobile Climate Control
For a better climate



MCC outperforms
competition on
Houston pull-down

The Best Source for All Your Bus AC Needs

www.mcc-hvac.com

PN: 89-0044



Any bus

we have it

covered

ROOF MOUNT SYSTEMS Small Bus

INTEGRATED SPLIT SYSTEMS Any Bus

ROOF MOUNT SYSTEMS Large Bus

EcoFlex 4

- 11k Btu/hr (3.2kW) for 12V cooling
- 13k Btu/hr (3.8 kW) for 24V cooling
- All electric option



EcoFlex 6

- Split unit
- 20.5k Btu/hr (6kW) cooling



EcoLine 8

- 55k Btu/hr (16kW) with cooling and heating



EcoLine 10

- 60k Btu/hr (17.5kW) cooling



EcoLine 12

- Up to 66k Btu/hr (19.3kW) cooling
- Full ducting or tri-flow partial duct



Eco353 Narrow

- Transit duty rooftop specifically designed for narrow shuttle and school bus bodies
- Brushless motors
- Serviceable from inside the vehicle



Evaporators

- Slim profile ceiling hung evaporator offering the most headroom clearance
- 30k -105k Btu/hr (8.7kW - 30.7kW) cooling
- Integrated return air grill and filter
- Serviceable without cover removal
- Reusable wire mesh filter
- 40k Btu/hr (10.1kW)



- Integrated Bulkhead Evaporators
- 30k - 60k Btu/hr (8.7kW - 17.5kW) cooling



Condensers

- Roof Mount condenser up to 130k Btu/hr (38kW) cooling
- Suitable with any evaporator
- Skirt Mount condenser up to 130k Btu/hr (38kW) cooling
- Suitable with any evaporator



Rooftops

Eco 353 - Conventional

- 150k - 171k Btu/hr (44kW - 50kW) cooling
- 82k - 130k Btu/hr (24kW - 38kW) heating



Eco 136 - Conventional

- 82k - 150k Btu/hr (24kW-44kW) cooling
- 130k Btu/hr (38kW) heating



Eco 136e - Electric

- 109k Btu/hr (32kW) cooling
- 130k Btu/hr (38kW) glycol heating



Eco Xcel - Conventional and Electric

- 120k Btu/hr (34kW) cooling
- 126k Btu/hr (37kW) heating



Rear Mounts

Eco RM 35.II - Conventional

- 109k Btu/hr (32 kW) cooling
- 106k Btu/hr (36kW) heating



Eco RM 35e - Electric

- 92k Btu/hr (27kW) cooling
- 119k Btu/hr (34kW) heating

